


209.00 EUR
 incl. 19% VAT, plus [shipping](#)

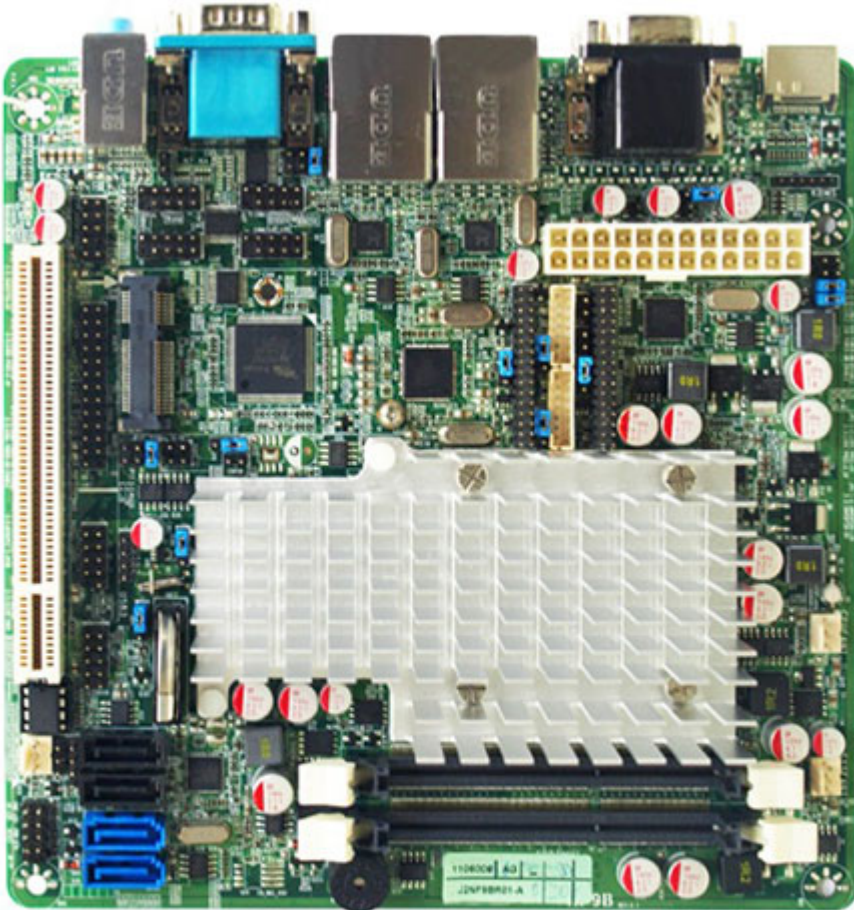

- Intel® Cedar Trail-D Processor D2550 + NM10 Chipset
- Support 2 * DDR3 1066MHz Single CH up to 4GB
- Support DirectX 10 Graphics up to 640MHz
- Support 2 * Serial ATAll (3Gb/s) & 2 * Serial ATAlll (6Gb/s)
- Realtek ALC662 6-CH HD Audio CODEC with 6-CH
- 1 * 24 bits Single Channel LVDS headers
- Support 2 CRT Display
- Supports 2 * Realtek RT8111EVL Gigabit LAN
- Support Watch dog Technology
- Support CPU Smart FAN
- Compliance with ErP standard
- Mini-ITX Form Factor (170mm x 170mm)

• CPU	• Intel® Cedar Trail-D Processor D2550 (1.86GHz) CPU
• Chipset	• Intel®NM10 Express chipset
• Memory	• 2 * DDR3 1066MHz Single CH SO-DIMM up to 4GB
• Expansion Slots	• 1 * PCI slot • 1 * Mini PCIe
• Storage	• 2 * Serial ATAll 3Gb/s + 2 * Serial ATAlll 6Gb/s connectors
• Audio	• Realtek ALC662 6-CH HD Audio CODEC
• Ethernet LAN	• 2 * RTL8111EVL PCI-E Gigabit LAN

• LVDS	• Onboard 24-bits single channel & 24-bits dual channel connectors
• USB	• Embedded 7 * USB 2.0/1.1
• Special Features	• Support ACPI S3 • Support CPU Smart FAN • Support Watch Dog
• Rear Panel I/O	• 4 * USB 2.0/1.1 ports • 2 * RJ-45 port • 2 * COM port • 2 * VGA port • 1 * HDMI Port • 1 * Audio port (Line-in, MIC and Line-out)
• Internal I/O	• 2 * USB 2.0/1.1 headers for 3 USB 2.0 ports • 1 * Parallel header • 1 * PS2/KB header • CPU /NB / Chassis Fan connectors; • 1 * GPIO header • 4 * COM headers(COM6 for RS232/422/485) • 1 * chassis intrusion header
• BIOS	• AMI 16MB DIP Flash ROM
• Form Factor	• Mini ITX Form Factor(170mm x 170mm)
• Functional	• ATM, Automation, medical Equipment, Security, Networking, POS, General Application, Gaming Machine, Transportation, Kiosk
• Certificate	• CE, FCC, RoHS
• Temperature	• Operating within 0~60 centigrade • Storage within -20-85 centigrade