


279.00 EUR

incl. 19% VAT, plus [shipping](#)

- LGA1150 !
- 6x COM !
- 2x LAN !
- Micro ATX Format !

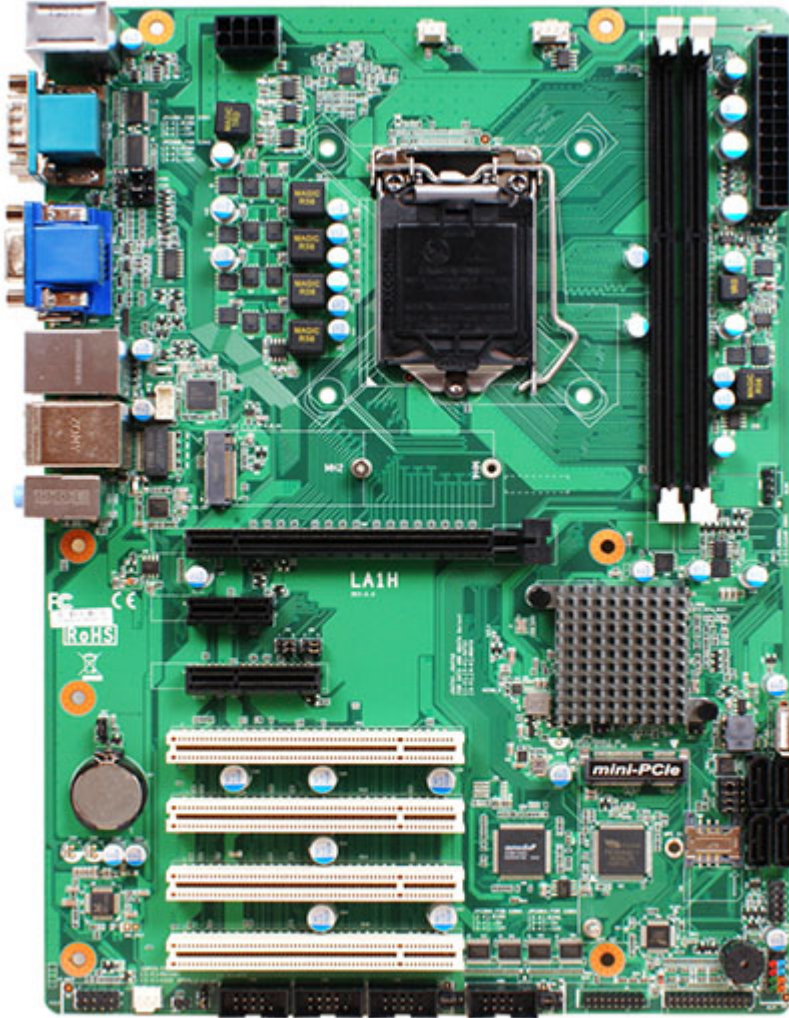

Support: [Datasheet](#)

- Intel® LGA1150 Socket support 4th Gen. Core Processor (Max. 90W)
- Intel® Lynx Point H81 Chip
- 2\* DDR3/DDR3L 1600/1333MHz up to 16GB
- Realtek HD Audio
- 1\* Intel®i217LM GbE, 1\* Intel® i211AT GbE
- 4\* SATA, 1\* M.2 (M key), 1\* PCIe x16, 1\* PCIe x4, 1\*PCIe x1, 4\* PCI
- 1\* VGA, 2\* HDMI
- 2\* RS232/422/485 (COM1/2), 4\* RS232, 2\* USB3.0, 7\* USB2.0
- ATX Power Input
- ATX Form Factor (305 \*220 mm)

Model	– JLA1H-00 – JLA1H-0A (Without Audio function)
Form Factor	– ATX (305 * 220mm)

Processor System	<ul style="list-style-type: none"> <li>- Intel® LGA1150 Socket supports 4th Gen. Core Processor (Max. 90W)</li> <li>- Intel® H81 Express chipset</li> <li>- AMI 32Mb Flash ROM BIOS</li> </ul>
Expansion Slot	<ul style="list-style-type: none"> <li>- 1* M.2 (M-key, 2242/2280, SATA Interface, CO-lay SATA4)</li> <li>- 1* Mini PCIe, full size (USB2.0 interface)</li> <li>- 4* SATA4 (Co-lay M.2)</li> <li>- 1* PCIe x16 + 1* PCIe x4 slot or 1* PCe x6 + 2* PCIe x1 slot</li> <li>- 4* PCI slots</li> </ul>
Memory	<ul style="list-style-type: none"> <li>- 2* LONG DIMM DDR3/DDR3L 1600/1333MHz DRAM up to 16GB</li> </ul>
Graphics	<ul style="list-style-type: none"> <li>- Intel® HD Graphics, shared memory</li> <li>- 1* VGA (Max Resolution: 1920x1200@60Hz)</li> <li>- 2* HDMI 1.4 (Max Resolution: 2560x1600@60Hz)</li> <li>- Support Dual Displays</li> </ul>
Ethernet	<ul style="list-style-type: none"> <li>- 1* Intel i217LM GbE</li> <li>- 1* Intel i211AT GbE</li> </ul>
Audio	<ul style="list-style-type: none"> <li>- HD audio: Realtek codec (JLA1H-00)</li> </ul>
SATA	<ul style="list-style-type: none"> <li>- 2* SATAIII (6.0Gb/s)</li> <li>- 2* SATAII (3.6Gb/s)</li> </ul>
Rear I/O	<ul style="list-style-type: none"> <li>- 1* VGA</li> <li>- 2* HDMI</li> <li>- 2* RJ45</li> <li>- 2* USB3.0</li> <li>- 4* USB2.0</li> <li>- Line-in, Line-out, MIC</li> <li>- 2* RS232/422/485 (support 5/12V TTL)</li> <li>- 1* PS/2</li> </ul>
Internal I/O	<ul style="list-style-type: none"> <li>- 2* USB 2.0</li> <li>- 1* USB2.0 (Erect)</li> <li>- 4* RS232 (COM3/4 support 5/12V TTL)</li> <li>- 1* Parallel (Co-lay GPIO)</li> <li>- 1* GPIO (16 bit, Co-lay Parallel)</li> <li>- 1* SIM Card slot</li> <li>- 1* Chassis intrusion</li> <li>- 1* Audio Header</li> <li>- 1* SMBUS / I2C</li> <li>- 1* AT mode</li> <li>- 1* TPM2.0 (option)</li> </ul>
Watchdog Timer	<ul style="list-style-type: none"> <li>- From Super I/O to drag RESETCON#</li> <li>- 256 segments (10sec ~ 255min)</li> </ul>
Power	<p>ATX PWR, AT/ATX Supported</p> <ul style="list-style-type: none"> <li>- AT: Directly PWR on as Power input ready</li> <li>- ATX: Press Button to PWR on after Power input ready</li> </ul>
Compliance	<ul style="list-style-type: none"> <li>- CE, FCC, RoHS, REACH</li> </ul>
Temperature	<ul style="list-style-type: none"> <li>- Operating: 0°C ~ 60°C</li> <li>- Storage: -20°C ~ 70°C</li> <li>- Humidity: 10% ~ 90% RH @40°C (non-condensing)</li> </ul>
OS Support	<ul style="list-style-type: none"> <li>- Windows 7, 8, 10, Linux</li> </ul>